


BEDROCK ELEVATION AND QUATERNARY THICKNESS MAPS OF THE KEOKUK 7.5' QUADRANGLE, LEE COUNTY, IOWA, HANCOCK COUNTY, ILLINOIS, AND CLARK COUNTY, MISSOURI

Ryan Clark and Phil Kerr
Iowa Geological Survey, IHR-Hydroscience & Engineering, University of Iowa, Iowa City, Iowa
Open File Map: OFM-21-8

BEDROCK ELEVATION

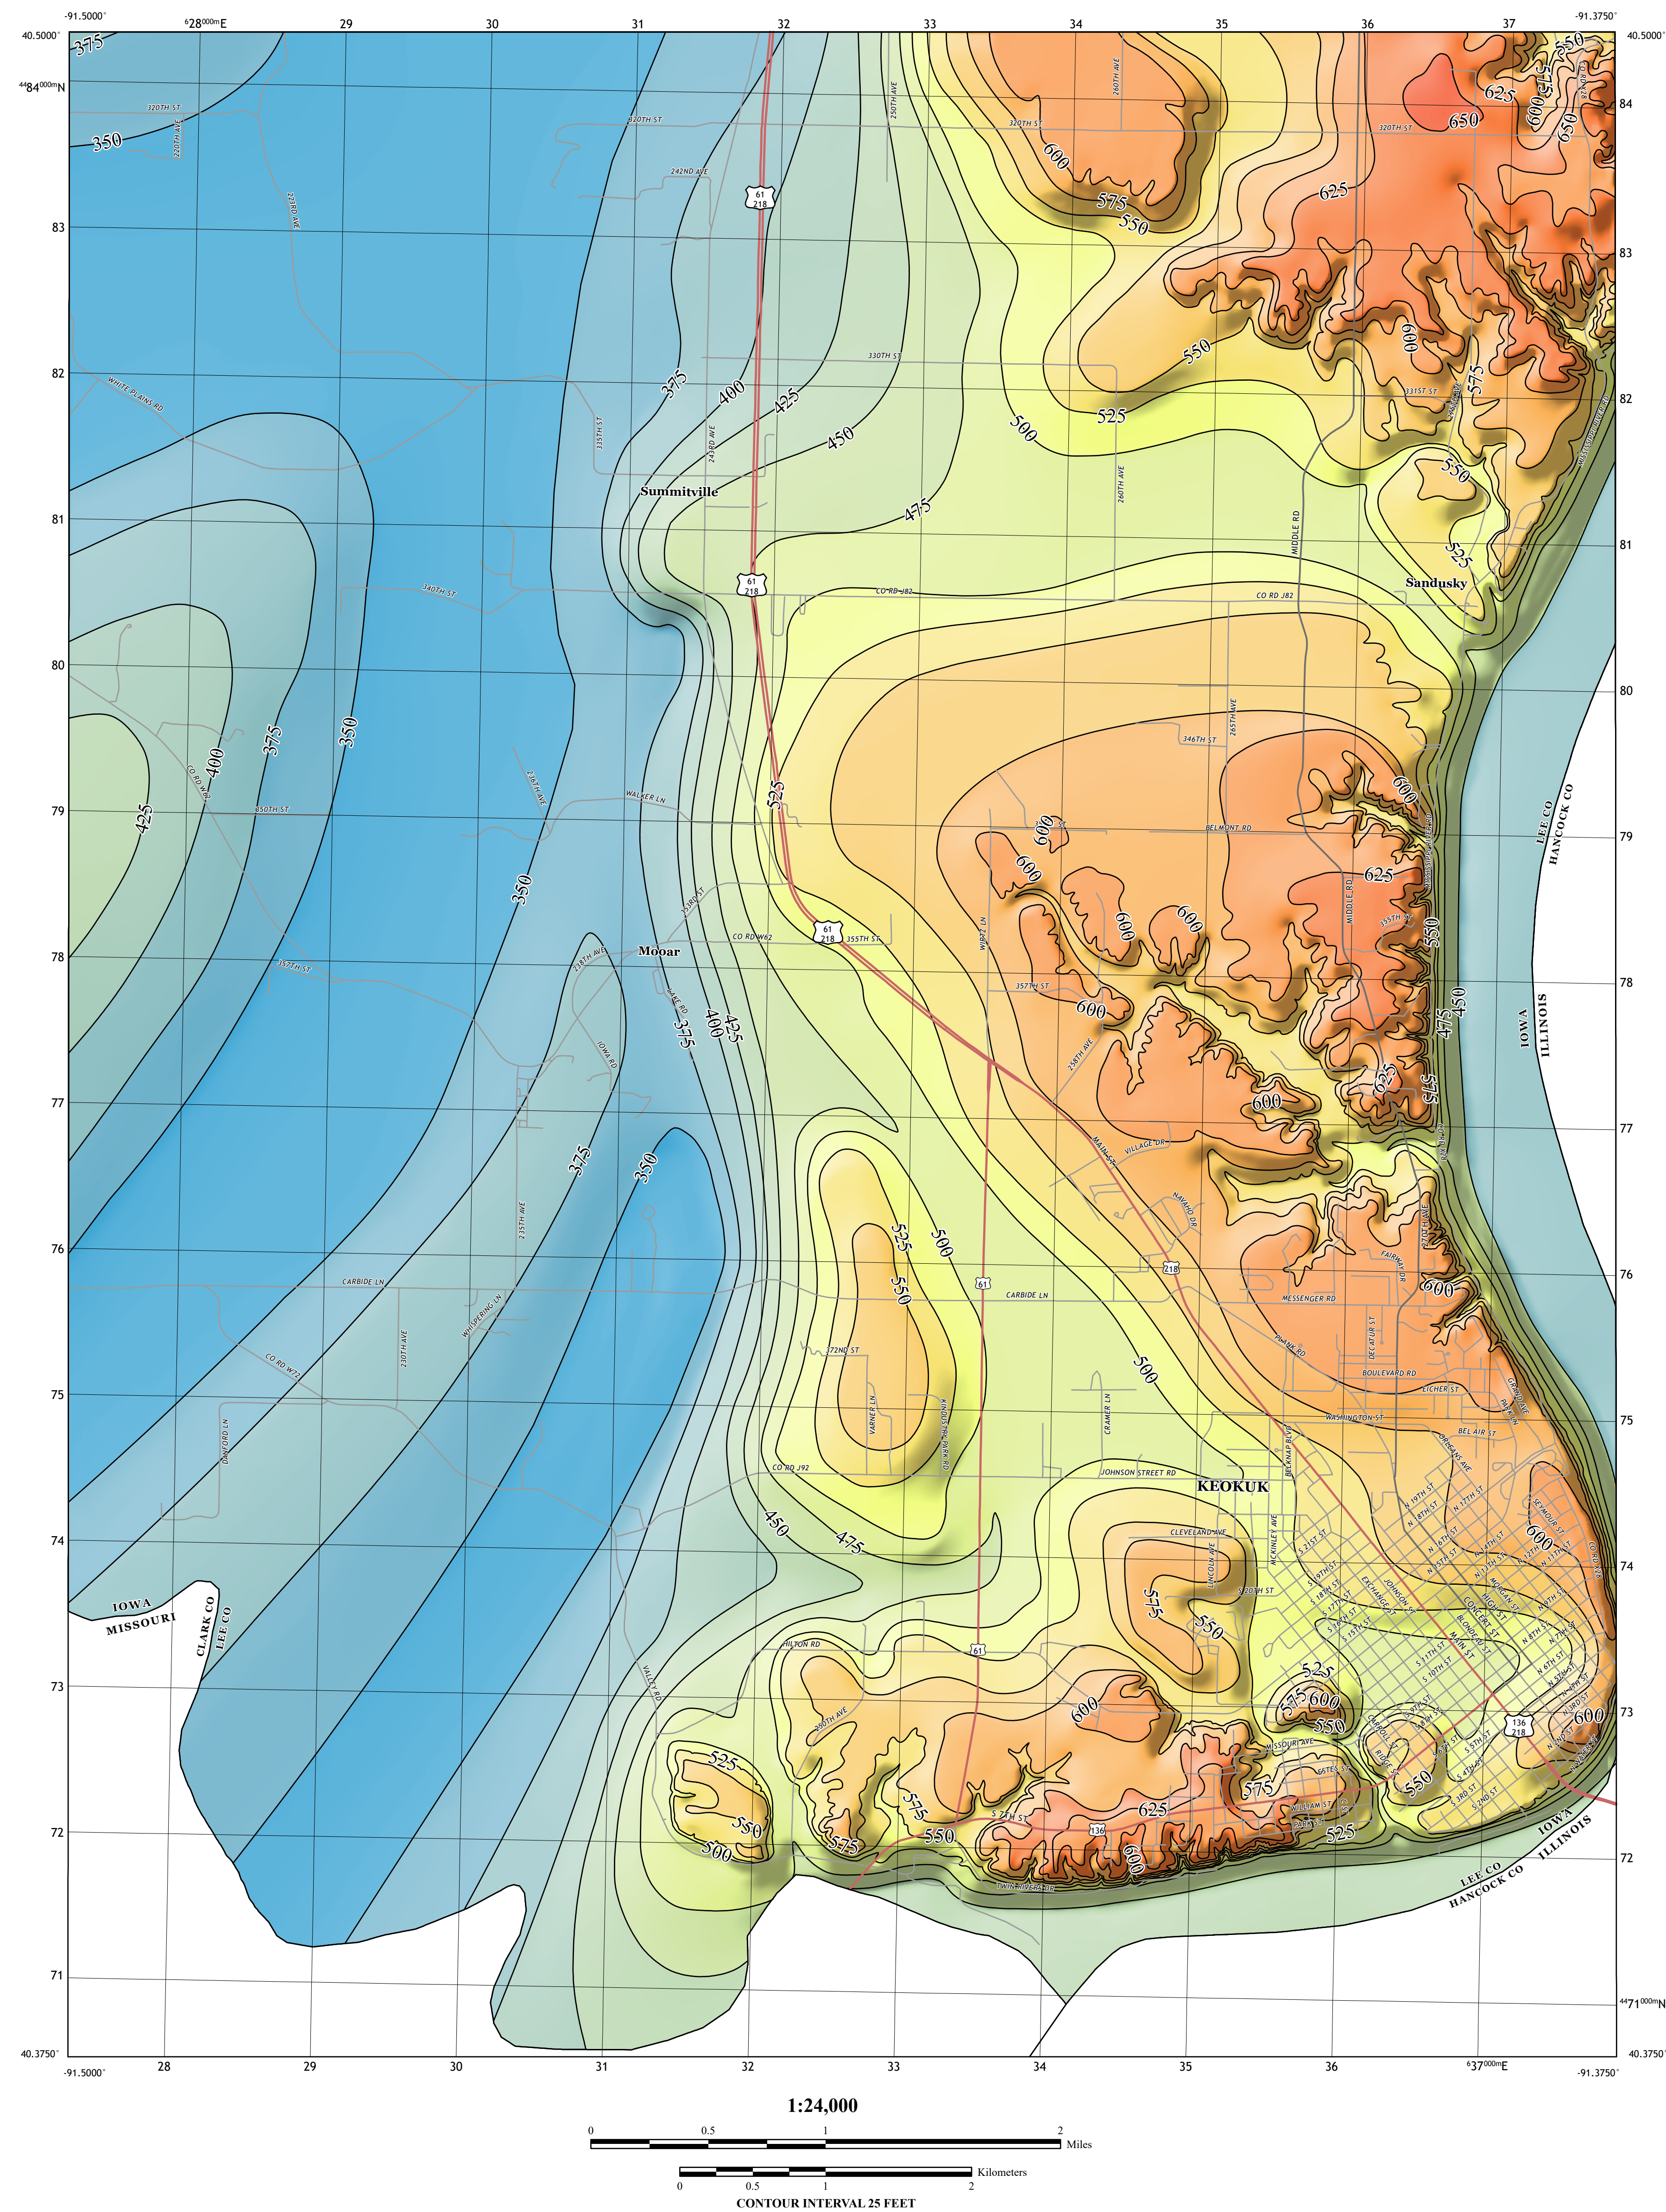

INTRODUCTION

The Bedrock Elevation and Quaternary Thickness Maps of the Keokuk 7.5' Quadrangle were produced in conjunction with the surficial and bedrock geologic maps. The bedrock surface within the quadrangle, like much of Iowa, is mostly concealed by glacial deposits. The boundary between Paleozoic bedrock and unconsolidated Quaternary materials is likely just as irregular as the land surface itself. Therefore, the thickness of Quaternary deposits varies widely across the quadrangle, generally ranging from 0 to 18 m (0-60 ft) and reaching a maximum of 92 m (300 ft) thick in the western portion of the mapping area. In contrast, bedrock exposures are common along the bluffs of the Mississippi River and its tributaries in the eastern and southern portions of the quadrangle.

Bedrock topographic lines were drawn based on borehole data coupled with bedrock outcrop occurrences identified while constructing the Bedrock Geologic Map of the Keokuk 7.5' Quadrangle (OFM-21-6). Where the bedrock surface is exposed or lies within a few feet of the land surface, the bedrock topography essentially mirrors the land surface topography, such as along the Mississippi River and its tributaries in the eastern and southern parts of the map area. Bedrock topographic detail is muted where bedrock is deeper and borehole data is scarce, such as within the bedrock valley in the western part of the map. The thickness of Quaternary materials was generated by subtracting the elevation of the bedrock surface from the land surface elevation. The Surficial Geologic Map of the Keokuk 7.5' Quadrangle (OFM-21-7) provides further information regarding the nature and extent of Quaternary deposits within the mapping area.

METHODOLOGY

The Bedrock Elevation and Quaternary Thickness Maps of the Keokuk 7.5' Quadrangle were constructed using the same datasets as the surficial and bedrock geologic maps. Geologic information utilized included drilling records housed in the Iowa Geological Survey (IGS) GeoSam database, existing maps and technical reports, Iowa Department of Transportation data, and reports from engineering projects and quarry operators. Field reconnaissance of seven bedrock outcrops and one of the three abandoned quarries was completed, as well as the collection of 19 passive seismic data points.

More than 240 boring records from the IGS GeoSam database, including both driller's logs and lithologic descriptions of well cutting samples (strip logs), were evaluated for the Keokuk Quadrangle. Each record was checked for locational accuracy using information from the driller's logs, historic plat books, county assessor information, and direct communication with landowners. The depth to the surficial-bedrock contact was determined for each well and assigned an elevation value by subtracting it from the surface digital elevation model (DEM). These data points provided the framework for the Bedrock Elevation Map. Additional information was gained from an assessment of the Natural Resources Conservation Service county soil survey by identifying soil series that indicate shallow bedrock.

Bedrock elevation contours were digitized manually on screen using ArcGIS software at a 25-foot contour interval. The bedrock elevation raster was generated using interpolations of the bedrock surface created with the "Topo to Raster" and "Empirical Bayesian Kriging" tools in ArcMap 10.6 or ArcGIS Pro 2.8. The Quaternary Thickness Map was created by subtracting the bedrock elevation raster values from the surficial DEM raster. The resulting surface was rounded to the nearest integer and contours were generated from this result and then smoothed.


BEDROCK ELEVATION	MAP SYMBOLS	QUATERNARY THICKNESS
<ul style="list-style-type: none"> ≥650 ≥625 ≥600 ≥575 ≥550 ≥525 ≥500 ≥475 ≥450 ≥425 ≥400 ≥375 ≥350 ≥325 	<ul style="list-style-type: none"> bedrock outcrop GeoSam point geophysics collection point topographic line river/stream hillshade 	<ul style="list-style-type: none"> ≥25 ≤50 ≤75 ≤100 ≤125 ≤150 ≤175 ≤200 ≤225 ≤250 ≤275 ≤300 ≤325 ≤350
	<p>ROAD CLASSIFICATION</p> <ul style="list-style-type: none"> U.S. Route State Route Local Route 	

UTM GRID AND 2021 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

0°04' 16 MILS 0°22' 7 MILS

ADJOINING QUADRANGLES		
1	2	3
4	5	6
7	8	

1 Argyle, IA-MO
2 Nauvoo, IA-IL
3 Nixa, IL-IA
4 Wayland, MO-IA
5 Hamilton, IL-IA
6 Kahoka SE, MO
7 Warsaw, IL-MO
8 Sutter, IL

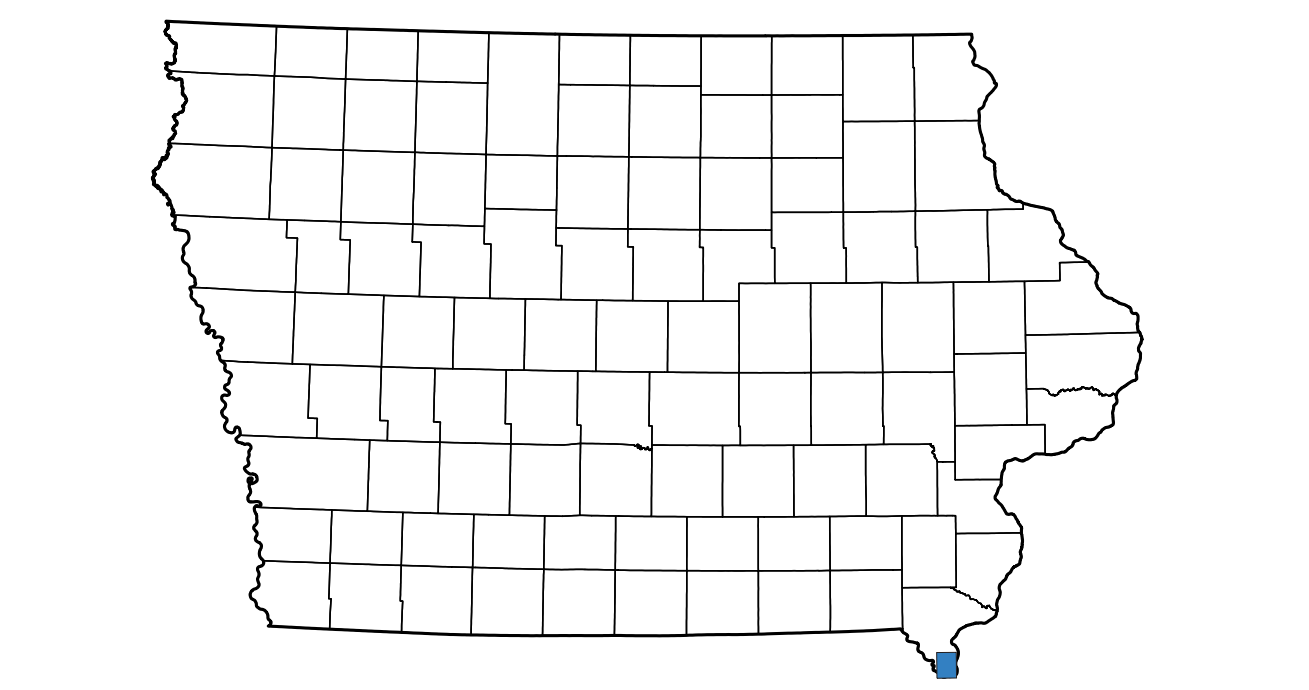

ACKNOWLEDGEMENTS

Special thanks to the landowners who allowed access to their properties: Jerry and Joan Boecker, Danny and Amy Hodges, Nathan Unsworth (Executive Director) of the Lee County Conservation Board, and John Byrd (Iowa Department of Natural Resources) of Shanek State Forest. Thanks also to Don Smith of Cusford Construction, Co. (Oldcastle Materials) for allowing us to access quarries in and around the mapping area. Drilling was provided by Matthew Streeter of the Iowa Geological Survey (IGS), University of Iowa (UI) Department of Earth and Environmental Sciences (EES) students Dan Bloch, Alethea Kapalis, Allison Kuskis, and Brennan Hill helped with various aspects of data collection and management including producing descriptive logs of water well cutting samples, updating well locations, and geophysical data acquisition. Thanks to Rick Langel (IGS) for managing the Iowa geologic sampling database (GeoSam). Special thanks to Kathy Woods (retired) of the Natural Resources Conservation Service and Art Betts (retired, UI-EES) for assistance with core description and for numerous valuable discussions regarding the geology of southeast Iowa. Casey Kohrt and Chris Kable of the Iowa Department of Natural Resources provided GIS technical help. Administrative support was provided by Suzanne Doernick, Melissa Eckrich, Teresa Gaffey, Carmen Langel, and Rosemary Tiwari.

Base map from the USGS Keokuk 7.5' Quadrangle map, published by the U.S. Geological Survey in 2018. Map projection and coordinate system based on Universal Transverse Mercator (UTM) Zone 15N, datum NAD83.

The maps are based on interpretations of the best available information at the time of mapping. Map interpretations are not a substitute for detailed site-specific studies. The views and conclusions contained in this document are those of the authors and should not be interpreted as necessarily representing the official policies, either expressed or implied, of the U.S. Government.

Supported in part by the U.S. Geological Survey Cooperative Agreement Number G20AC0043 National Cooperative Geologic Mapping Program (STATEMAP). This work was partially supported by a National Science Foundation Award Improving Undergraduate STEM Education Grant GPI-16-06262.

QUATERNARY THICKNESS

